



ATMO^{kustik} 20/12



Achsraster	20 mm
Bohr-Durchmesser	12 mm
Perforation	28,27 %
Akustikvlies	ja
Bedämpfung	50 mm

WANDABSTAND	α_w	ABSORBERKLASSE
250 mm	0,85	B

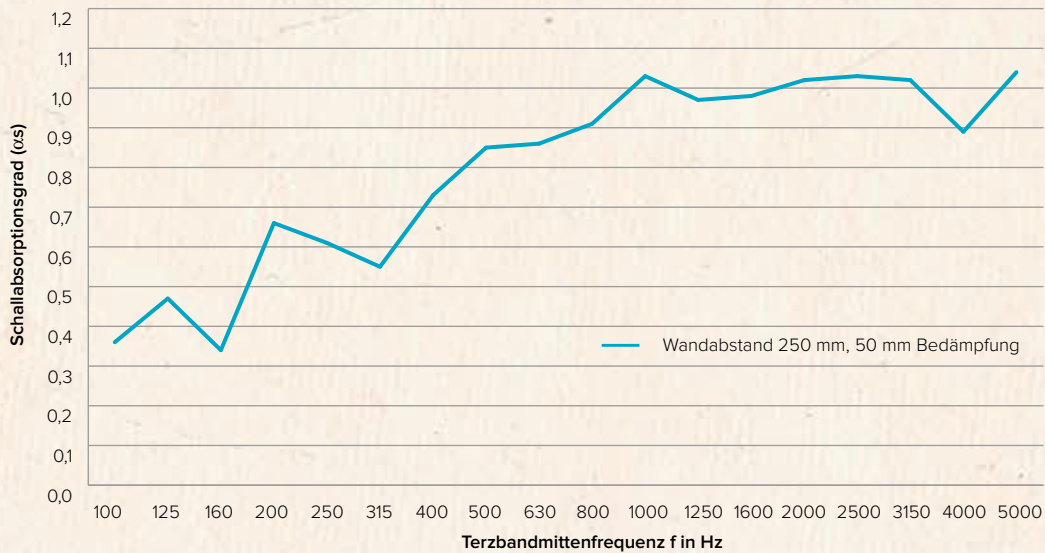

WA 250 mm	0,36	0,47	0,34	0,66	0,61	0,55	0,73	0,85	0,86	0,91	1,03	0,97	0,98	1,02	1,03	1,02	0,89	1,04
	0,40		0,60		0,80		0,95		1,00		1,00							

nach EN ISO 354