



ATMO^{phon} 4/4extra



Stegbreite	4 mm
Schlitzbreite	4 mm
Perforation	15,63 %
Akustikvlies	ja
Bedämpfung	50 mm

WANDABSTAND	α_w	ABSORBERKLASSE
250 mm	0,80(H)	B

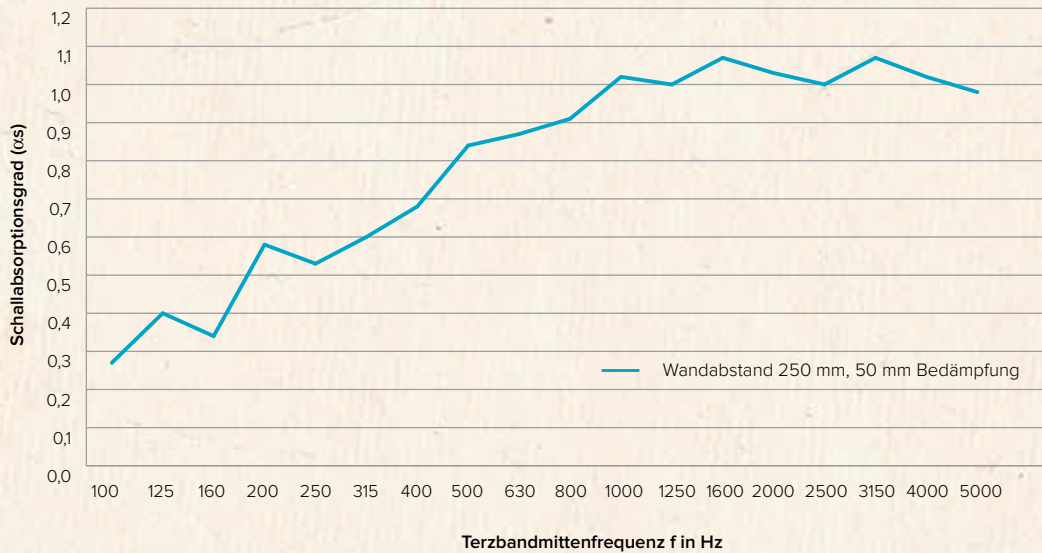

WA 250 mm	0,27	0,40	0,34	0,58	0,53	0,60	0,68	0,84	0,87	0,91	1,02	1,00	1,07	1,03	1,00	1,07	1,02	0,98
	0,35			0,55			0,80			1,00			1,05		1,00			

nach EN ISO 354