



ATMO^{phon} 6/2



Stegbreite	6 mm
Schlitzbreite	2 mm
Perforation	6,25 %
Akustikvlies	ja
Bedämpfung	50 mm

WANDABSTAND	α_w	ABSORBERKLASSE
250 mm	0,75	C

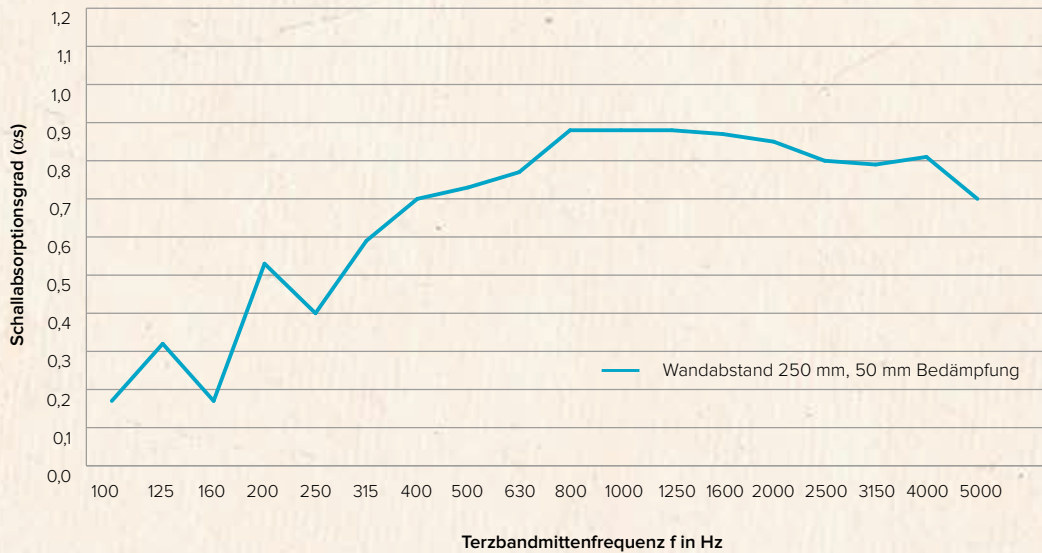

WA 250 mm	0,17	0,32	0,17	0,53	0,40	0,59	0,70	0,73	0,77	0,88	0,88	0,88	0,87	0,85	0,80	0,79	0,81	0,70
	0,20		0,50		0,75		0,90		0,85		0,75							

nach EN ISO 354