



ATMO^{kustik} 8/4



Achsraster	8 mm
Bohr-Durchmesser	4 mm
Perforation	19,63 %
Akustikvlies	ja
Bedämpfung	50 mm

WANDABSTAND	α_w	ABSORBERKLASSE
250 mm	0,90	A

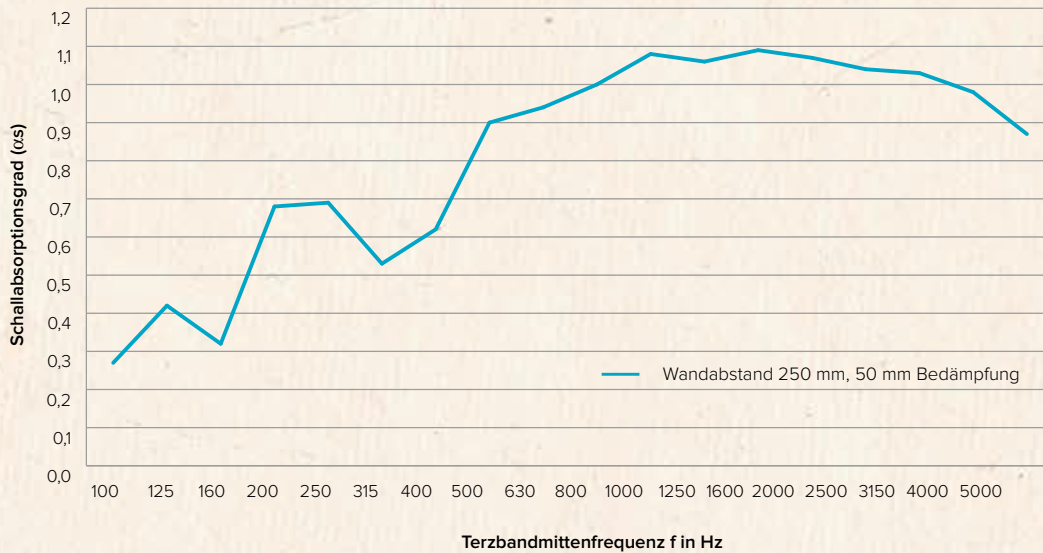

WA 250 mm	0,27	0,42	0,32	0,68	0,69	0,53	0,62	0,90	0,94	1,00	1,08	1,06	1,09	1,07	1,04	1,03	0,98	0,87
	0,35		0,65		0,80		1,05		1,05		0,95							

nach EN ISO 354